

SONAR 75

ES

Montaje: Suspendido.
Fuente de luz: Módulos compactos LED COB Tridonic. Temperatura de color 4000K. Disponible, 3000K.
Sistema óptico: Reflector.
Distribución luminosa: Directa. Estándar 36°. Disponible 24°.
Equipo eléctrico: Equipo de control electrónico. PF>0,95. Disponible, regulable DALI.
Materiales: Cuerpo: Aluminio extruido lacado en blanco. Reflector: Aluminio anodizado brillante. Cierre: Cristal transparente. Suspensión de cable 2 m.
Acabado: Cuerpo color blanco RAL 9003 (estándar). Opcional gris RAL 9006, negro RAL 9005.




EN

Mounting: Suspended.
Light source: LED compact modules COB Tridonic. Temperature color 4000K. Available, 3000K.
Optical system: Reflector.
Light distribution: Direct. Standard 36°. Available 24°.
Electrical equipment: Electronic control gear. PF>0,95. Available, dimmable DALI.
Materials: Body: Aluminum extruded lacquered in white. Reflector: Bright anodized aluminum. Cover: Transparent glass. Wire lenght 2 m.
Surface finish: Body white color RAL 9003 (standard). Optional grey RAL 9006, black RAL 9005.




ESTANDAR | STANDARD


SONAR-75-36°-12W



SONAR-75-24°-12W



ESTANDAR COLOR BLANCO
STANDARD WHITE COLOR

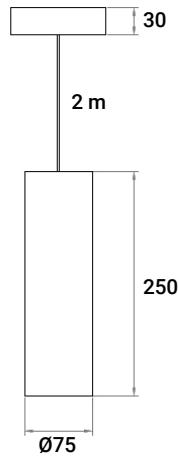

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS, 220-240V / 50-60Hz, IP 40, IK 02, CLASE I / CLASS I, 50.000h / L80B10, -20° / +45°, CRI 80, 36°

DISPONIBLE/AVAILABLE

DALI, 3000K, 24°

CONFIGURACION ONLINE
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
SON111K8B	SONAR-75-36°-12W 1840lm/940	0,8	12W	1840	153 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI, T.COLOR 3000K, OPTICA/LENS 24°