

ONIX/NPC

ES

Montaje: Adosado/Suspendido.
Fuente de luz: Tubo LED T8 (G13).
Sistema óptico: Difusor, reflector.
Distribución luminosa: Directa.
Equipo eléctrico: Precableado LED. Disponible, kit de emergencia (1-3 h) y/o montaje de línea continua.
Materiales: Cuerpo: Policarbonato inyectado irrompible. Reflector: Acero laminado en frío lacada en epoxi-poliéster blanco. Difusor: Policarbonato irrompible inyectado con prismas longitudinales. Disponibles cierres de acero inoxidable.
Acabado: Color gris.




EN

Mounting: Surface/Suspended.
Light source: LED Tube T8 (G13).
Optical system: Diffuser, reflector.
Light distribution: Direct.
Electrical equipment: Prewired LED. Available, emergency kit (1-3 h) and/or continuous line assembly.
Materials: Body: Injected polycarbonate unbreakable. Reflector: Cold rolled steel lacquered in white epoxy-polyester. Diffuser: Injected unbreakable polycarbonate with longitudinal prismatic stripes. Available Stainless steel clips.
Surface finish: Grey color.



ONIX/NPC



INCLUIDO/INCLUDED

Abrazadera inox/ Stainless clamp



DISPONIBLE/AVAILABLE

Set de suspensión/ Suspension set



DISPONIBLE/AVAILABLE

Clips inox/Inox clips



Policarbonato irrompible
Unbreakable polycarbonate




MONTAJE CON KIT DE EMERGENCIA 1/3h
ASSEMBLY WITH EMERGENCY KIT 1/3h

DISPONIBLE/AVAILABLE





MONTAJE/MOUNTING

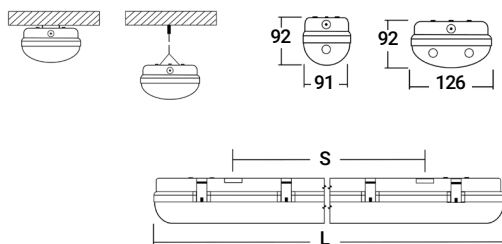

| | L | S | Clips |
|------------------|------|-----|-------|
| 1X600 2X600 | 650 | 390 | 6 |
| 1X1200 2X1200 | 1260 | 860 | 10 |
| 1X1500 2X1500 | 1560 | 970 | 12 |

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS
 110-240V / 50-60Hz
 IP 65
 IK 08
 CLASE II / CLASS II
 50.000h / L80B10
 -40° / +65°
 CRI 80

DISPONIBLE/AVAILABLE

EMERGENCY
 1h
 3h

CONFIGURACION ONLINE
ONLINE CONFIGURATION



| Código Code | Referencia Reference | Kg | Potencia Power | Lámpara Lamp | Portalámparas Lampholder | Regulación 1-10V DALI | Emergencia MC1 MC3 |
|----------------|----------------------------------|-----|-------------------|-----------------|-----------------------------|--------------------------|-----------------------|
| ONX211P5G | ONIX/NPC-1x600 Precableado LED5 | 0,7 | - | Tubo LED | G13 | - - | - - |
| ONX311P5G | ONIX/NPC-1x1200 Precableado LED5 | 1,3 | - | Tubo LED | G13 | - - | - - |
| ONX411P5G | ONIX/NPC-1x1500 Precableado LED5 | 1,6 | - | Tubo LED | G13 | - - | - - |
| ONX222P5G | ONIX/NPC-2x600 Precableado LED5 | 0,9 | - | Tubo LED | G13 | - - | - - |
| ONX322P5G | ONIX/NPC-2x1200 Precableado LED5 | 1,7 | - | Tubo LED | G13 | - - | - - |
| ONX422P5G | ONIX/NPC-2x1500 Precableado LED5 | 2,0 | - | Tubo LED | G13 | - - | - - |

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

SET DE SUSPENSION/SUSPENSION SET CONECTOR RAPIDO/FAST CONNECTOR IP68 CLIPS INOX/INOX CLIPS
 ELECTRIFICACION LC 3 POLOS/ELECTRIFICACION LC 3 PINES ELECTRIFICACION LC 5 POLOS/ELECTRIFICACION LC 5 PINES