

NT55/OPAL D-I

ES

Montaje: Suspendido.
Fuente de luz: Módulos lineales LED SMD TRIDONIC.
 Temperatura de color 4000K.
 Disponible, 3000K.
Sistema óptico: Iluminación directa: Difusor opal.
 Iluminación indirecta: Difusor opal.
Distribución luminosa: Directa e indirecta.
Equipo eléctrico: Equipo de control electrónico. PF>0,95.
 Disponible, regulable DALI y/o kit de emergencia (1-3 h).
Materiales: Cuerpo: Perfil de aluminio extruido.
 Difusor (directa): Opal. Difusor (indirecta): Opal.
Acabado: Color blanco RAL 9003.
 Disponible, gris RAL 9006, negro RAL 9005.





EN

Mounting: Suspended.
Light source: TRIDONIC SMD LED linear modules.
 Temperature color 4000K.
 Available, 3000K.
Optical system: Direct lighting: Opal diffuser.
 Indirect lighting: Opal diffuser.
Light distribution: Direct and indirect.
Electrical equipment: Electronic control gear. PF>0,95.
 Available, dimmable DALI and/or emergency kit (1-3 h).
Materials: Body: Extruded aluminum profile.
 Diffuser (direct): Opal diffuser. Diffuser (indirect): Opal.
Surface finish: White color RAL 9003.
 Available, grey RAL 9006, black RAL 9005.




NT55/OPAL/D-I




GRIS/GREY

ILUMINACION
 DIRECTA-INDIRECTA
 DIRECT-INDIRECT
 LIGHTING




BLANCO/WHITE


ESTANDAR COLOR BLANCO BAJO CONSULTA/UNDER REQUEST
 STANDARD WHITE COLOR TUNABLE WHITE

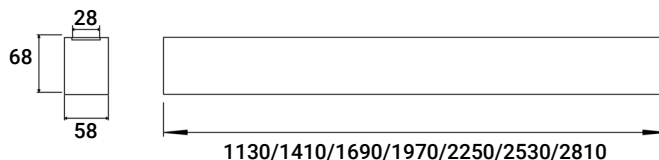

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
N55271K8B	NT55/OPAL/D-I-570-16+8W 2540+1270lm/840+SUS	2,4	16+8W	2540+1270	159 lm/W	4000
N55273K6B	NT55/OPAL/D-I-570-24+12W 3600+1800lm/840+SUS	2,4	24+12W	3600+1800	150 lm/W	4000
N55373K6B	NT55/OPAL/D-I-1130-32+24W 5080+3810lm/840+SUS	3,7	32+24W	5080+3810	159 lm/W	4000
N55377K2B	NT55/OPAL/D-I-1130-48+36W 7200+5400lm/840+SUS	3,7	48+36W	7200+5400	150 lm/W	4000
N55474K5B	NT55/OPAL/D-I-1410-40+32W 6350+5080lm/840+SUS	4,4	40+32W	6350+5080	159 lm/W	4000
N55479K0B	NT55/OPAL/D-I-1410-60+48W 9000+7200lm/840+SUS	4,4	60+48W	9000+7200	150 lm/W	4000
N55577K6B	NT55/OPAL/D-I-1690-48+40W 7600+6330lm/840+SUS	5,2	48+40W	7600+6330	158 lm/W	4000
N555710KB	NT55/OPAL/D-I-1690-72+60W 10800+9000lm/840+SUS	5,2	72+60W	10800+9000	150 lm/W	4000
N55678K8B	NT55/OPAL/D-I-1970-56+48W 8850+7580lm/840+SUS	5,9	56+48W	8850+7580	158 lm/W	4000
N556712KB	NT55/OPAL/D-I-1970-84+72W 12600+10800lm/840+SUS	5,9	84+72W	12600+10800	150 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI T.COLOR 3000K, 4000K FLORON DECORATIVO/DECORATIVE CEILING BASE

BAJO CONSULTA/UNDER REQUEST TUNABLE WHITE