

NT55/OPT1 D-I

ES

Montaje: Suspendido.

Fuente de luz: Módulos lineales LED SMD TRIDONIC.
Temperatura de color 4000K.
Disponible, 3000K.

Sistema óptico: Iluminación directa: Óptica estándar LEDIL 80°. Disponible, 50°. Iluminación indirecta: Difusor opal.

Distribución luminosa: Directa e indirecta.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.
Disponible, regulable DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Perfil de aluminio extruido.
Difusor (directa): Ópticas de 80°, 50°. Difusor (indirecta): Opal.

Acabado: Color blanco RAL 9003.
Disponible, gris RAL 9006, negro RAL 9005.



EN

Mounting: Suspended.

Light source: TRIDONIC SMD LED linear modules.
Temperature color 4000K.
Available, 3000K.

Optical system: Direct lighting: LEDIL standard lens 80°. Available, 50°. Indirect lighting: Opal diffuser.

Light distribution: Direct and indirect.


Electrical equipment: Electronic control gear. PF>0,95.
Available, dimmable DALI and/or emergency kit (1-3 h).

Materials: Body: Extruded aluminum profile.
Diffuser (direct): Lenses 80°, 50°. Diffuser (indirect): Opal.


Surface finish: White color RAL 9003.
Available, grey RAL 9006, black RAL 9005.



ESTANDAR | STANDARD
NT55/OPT1-80°-D-I




NT55/OPT1-50°-D-I




FLICKER FREE
UGR <17
*Directa Direct

ESTANDAR COLOR BLANCO BAJO CONSULTA/UNDER REQUEST
STANDARD WHITE COLOR TUNABLE WHITE

ILUMINACION DIRECTA-INDIRECTA
DIRECT-INDIRECT LIGHTING

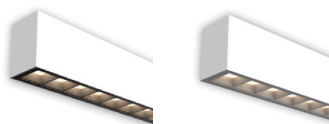

BAJO CONSULTA/UNDER REQUEST
Acabado de ópticas en color blanco o negro.
Lenses finish in white or black.

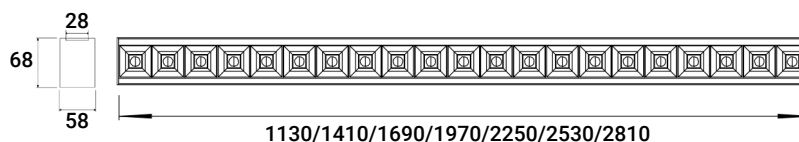

ESTANDAR/STANDARD

DISPONIBLE/AVAILABLE

CONFIGURACION ONLINE
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
N50316K4B	NT55/OPT1-80°/D-I-1130-44W 6400lm/840+SUS	3,7	44W	6400	145 lm/W	4000
N50418K2B	NT55/OPT1-80°/D-I-1410-56W 8200lm/840+SUS	4,4	56W	8200	146 lm/W	4000
N505110KB	NT55/OPT1-80°/D-I-1690-69W 10000lm/840+SUS	5,2	69W	10000	145 lm/W	4000
N506111KB	NT55/OPT1-80°/D-I-1970-82W 11700lm/840+SUS	5,9	82W	11700	143 lm/W	4000
N507113KB	NT55/OPT1-80°/D-I-2250-94W 13000lm/840+SUS	7,4	94W	13000	138 lm/W	4000
N508114KB	NT55/OPT1-80°/D-I-2530-107W 14900lm/840+SUS	8,7	107W	14900	139 lm/W	4000
N509116KB	NT55/OPT1-80°/D-I-2810-120W 16800lm/840+SUS	9,2	120W	16800	140 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI T.COLOR 3000K OPTICA/LENS 50° FLORON DECORATIVO/DECORATIVE CEILING BASE

BAJO CONSULTA/UNDER REQUEST TUNABLE WHITE